




2SC HYDRAULIC HOSE

Global Flex Hydraulic Hose

Recommended for all high pressure hydraulic applications where a lightweight, flexible hose with a small bend radius is required

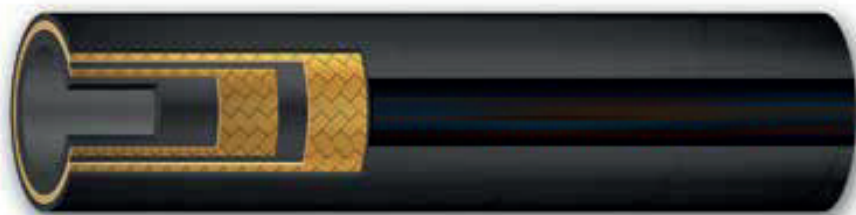

GLOBALFLEX

SPECIFICATIONS

HOSE		INSIDE Ø			OUTSIDE Ø		WORKING PRESSURE		BURST PRESSURE	BEND RADIUS	WEIGHT
part number	dash size	DN	inch	mm	mm	bar	psi	bar	mm	kg/m	
GF2SC04	-4	06	1/4	6.4	14.2	400	5800	1600	75	0.30	
GF2SC05	-5	08	5/16	8.0	16.0	350	5075	1400	85	0.34	
GF2SC06	-6	10	3/8	9.5	18.3	330	4785	1320	90	0.42	
GF2SC08	-8	12	1/2	12.7	21.5	275	3990	1100	130	0.54	
GF2SC10	-10	16	5/8	15.9	24.7	250	3625	1000	170	0.68	
GF2SC12	-12	19	3/4	19.0	28.6	215	3120	860	200	0.80	
GF2SC16	-16	25	1	25.4	36.6	165	2390	660	250	1.15	
GF2SC20	-20	31	1-1/4	31.8	43.6	140	2030	560	250	1.57	
GF2SC24	-24	38	1-1/2	38.1	50.7	100	1450	400	300	1.90	

Tube

Oil resistant synthetic rubber

Reinforcement

Two tensile steel wire braids

Cover

Oil and weather resistant synthetic rubber

Temperature

-40°C to +100°C

Standards

DIN EN 857 3SC



Global Flex Swaging Machines

Looking to make your own hydraulic hoses?

Did you know Hydraulic Megastore offers a wide range of Global Flex swaging machines available in hand pump, air pump, 12V, single and three-phase.

We also offer 12V cutting machines for vehicle hose replacement and single phase and three-phase cutting machines for workshop locations.

Contact our sales team today for more information!

30+ Years in the Hydraulic Industry

 **01472 255 928**

www.hydraulicmegastore.com | hello@hydraulicmegastore.com

 Unit 3 Estate Road 5, South Humberside Industrial Estate, Grimsby, North East Lincs, DN31 2TG

A PROUD PART OF

R&G
FLUID POWER GROUP