




4SP HYDRAULIC HOSE

Global Flex Hydraulic Hose

All high pressure hydraulic applications where a durable, flexible hose is required.

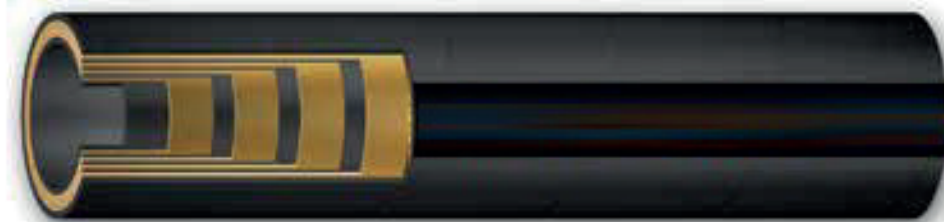

GLOBALFLEX

SPECIFICATIONS

HOSE		INSIDE Ø		OUTSIDE Ø	WORKING PRESSURE		BURST PRESSURE	BEND RADIUS	WEIGHT	
part number	dash size	DN	inch	mm	mm	bar	psi	bar	mm	kg/m
GF4SP08	-8	12	1/2	12.7	23.8	415	6020	1660	230	0.89
GF4SP12	-12	19	3/4	19.0	31.4	350	5075	1400	300	1.50
GF4SP16	-16	25	1	25.4	38.5	280	4060	1120	340	2.00

Tube

Oil resistant synthetic rubber

Reinforcement

Four high tensile steel wire braids

Cover

Oil and weather resistant synthetic rubber

Temperature

-40°C to +155°C

Standards

DIN EN 856 4SP



Global Flex Swaging Machines

Looking to make your own hydraulic hoses?

Did you know Hydraulic Megastore offers a wide range of Global Flex swaging machines available in hand pump, air pump, 12V, single and three-phase.

We also offer 12V cutting machines for vehicle hose replacement and single phase and three-phase cutting machines for workshop locations.

Contact our sales team today for more information!

30+ Years in the Hydraulic Industry

 **01472 255 928**

 www.hydraulicmegastore.com |  hello@hydraulicmegastore.com

 Unit 3 Estate Road 5, South Humberside Industrial Estate, Grimsby, North East Lincs, DN31 2TG