




YB-P20

Global Flex Crimping Machine

P20 hose crimping machine has been designed to crimp up to 1 1/2" diameter 4-spiral hoses. Great for workshop use, fast and easy to use

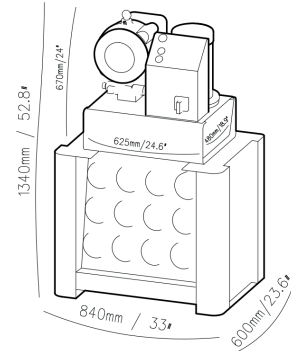

GLOBALFLEX

TECHNICAL DATA Crimping /hour: 600/850 & Oil Tank Volume (L) 32

Max crimping dia (mm)	10 - 61
Max crimping dia (inches)	0.39 - 2.40
Max crimping force (kN)	1370
Max crimping force (tonnage)	137
Cycle time 10mm (s)	3.6
Hose size ID (inches)	1 1/2
Die set series	P20
Max opening (mm)	+25
Max opening without dies (mm)	109
Master die D/L (inches)	3.31/3.15
Motor Voltage (V): Tri	200/220/380/440
Motor Voltage (V): Mono	110/115/220/230/240

P20 DIES

DieSetNo	Crimping Range	ID (mm)	L (mm)
P20/06*	6.0 - 8.0	6	25
P20/08*	8.0 - 10.0	8	25
P20/10*	10.0 - 12.0	10	55
P20/12*	12.0 - 14.0	12	55
P20/14	14.0 - 16.0	14	55
P20/16	16.0 - 19.0	16	55
P20/19	19.0 - 23.0	19	55
P20/23	23.0 - 27.0	23	55
P20/27	27.0 - 31.0	27	70
P20/31	31.0 - 36.0	31	70
P20/36	36.0 - 41.0	36	75
P20/41	41.0 - 47.0	41	75
P20/47	47.0 - 54.0	47	85
P20/54*	54.0 - 61.0	54	85

*Non standard dies



Hydraulic Hose & Fittings

Looking for hydraulic hose and fittings to go with your new swaging machine? We stock large quantities of hydraulic hose and fittings for use across every industry including; 1 wire, 2 wire, 4 wire and 6 wire hose, and fittings available in mild or stainless steel.

Looking to start a mobile hose replacement business?

We have a recommended starting stock list for any new van, speak to our sales team to discuss your specific needs.

30+ Years in the Hydraulic Industry

01472 255 928

www.hydraulicmegastore.com | hello@hydraulicmegastore.com

Unit 3 Estate Road 5, South Humberside Industrial Estate, Grimsby, North East Lincs, DN31 2TG

